



MANUFACTURER:
Gomix Co., Ltd
Gomix (Guangdong) Building Materials Co., Ltd

Office Address: Room 1204-1206, Junyi Building, No. 38th Huangshi North Road, Baiyun District, Guangzhou City.
Factory Address: Fei'eling, West of Fei'e Avenue, Shiwan Town, Boluo County, Huizhou City, Guangdong Province, China.
Tel: +86 136 8640 0549 **E-mail:** info@gomixhk.com
Website: www.gomixhk.com

Tile Adhesive & Grout
Waterproofing
Wall Putty & Skim Coat & Renders
Wall Paint & Primer
Additives
Flooring Compounds & Screeds
Construction Grout
EPS Basecoat Adhesive



PRODUCT BROCHURE

Tile Adhesive & Grout



C1TE Tile Adhesive

20kg/Bag

A premium grade, thick or thin bed, polymer modified, powdered cement based adhesive, specifically formulated to bond tiles onto a variety of substrates. Classified as BS EN 12004 Type C1.
Apply for: Floor tiles, wall tiles up to 80x80cm
Coverage: 5~8kg/m². Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: Grey/White



C2TE Super Tile Adhesive

20kg/Bag


A premium grade, polymer fortified and reinforced adhesive specifically designed for big size high quality porcelain, stone and marble installations. Classified as BS EN 12004 Type C2.
Apply for: Floor tiles, wall tiles up to 60x120cm.
Coverage: 5~8kg/m². Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: Grey/White.



C2TES1 Flexible Tile Adhesive

20kg/Bag

A high performance, flexible, lightweight, cementitious adhesive with no vertical slip and long open time, low dust technology and extremely high yield. Easy to apply by trowel with excellent wetting-out properties, for stone ceramic tiles, and thin porcelain gres tiles. Classified as BS EN 12004 Type C2.
Apply for: Floor tiles, wall tiles up to 75x150cm.
Coverage: 5~8kg/m². Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: Grey/White.

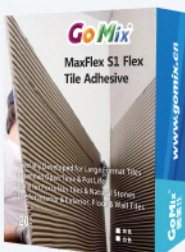

MaxFlex S1 High Flexible Tile Adhesive

20kg/Bag

A high flexible tile adhesive, specifically formulated to have enhanced properties of adhesion and flexibility ideal for fixing large format ceramic tiles, sintered stone, fully vitrified tiles and other tiles with low porosity as well as glass and porcelain mosaics. The enhanced performance of MaxFlex means that it has a considerably longer open time. Classified as BS EN 12004 Type C2.
Apply for: Apply for All kind of tiles, include over-size heavy slate.
Coverage: 5~8kg/m². Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: Grey/White.



Rubber-modified Flexible Tile Adhesive

20kg/Bag

A high strength, polymer & rubber fortified, cement based tile adhesive which has been formulated to provide extended coverage and flexibility. Classified as BS EN 12004 Type C2S1 and AS 4992.1.
Apply for: Most tile types including ceramics, porcelains, non-moisture sensitive marble, slate, granite and mosaics.
Coverage: 5~8kg/m². Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: Grey/White/Off White.



D1TE Premixed Mastic Tile Adhesive

20kg/Pail

A premium-grade, ready to use, flexible, nonflammable tile adhesive. Its non-slump formulation makes it for setting glazed and unglazed ceramic and subway porcelain tiles on walls, floors and countertops. Apply for: Suited for ceramic, mosaic, quarry, pavers, gauged slate, porcelain and gauged stone tile. Coverage: Approximately 8-10m² per 20kg pail. Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: White.



C2T Mosaic Adhesive & Grout

20kg/Bag

A high quality polymer modified cement- based 2 in 1 adhesive and grout for mosaic tiles. When added to water, it produces a smooth creamy paste for fixing mosaics as well as for filling tile joints. It fulfills the requirements of BS EN12004 Class C1 with slip resistance.
Apply for: Mosaic tiling and grouting, suitable to swimming pool mosaic bonding.
Coverage: 5~8kg/m². Coverage will vary depending on the condition of the surface being tiled and application technique.
Color: White.



CG2 Tile Grout

5kg/20kg/Bag


A high quality polymer-modified, water resistant, cement based grout designed for grouting glazed wall tiles, porcelain tiles, mosaic, vitrified & fully vitrified tiles, natural and engineered stones.
Apply for: Interior and exterior tile gap filling, up to a joint width of 10 mm.
Coverage: Depends on tile size, gap depth and width.
Color: White/Grey/Cream/Black, total 16 basic colors, customized colors available.



RG2 Epoxy Tile Grout

400ml/Dual Tube

A two-part epoxy tile grout designed for filling tile joints. It is composed of epoxy resin, curing agent and high-grade pigment. Featured with fast curing, excellent adhesion, high hardness, anti-acid and mold resistance. This epoxy tile sealant is specially recommended for use in kitchen and bathroom, sealing for the cabinet, sink, utensil, shower room, bathtub, etc.
Apply for: Interior tile gap filling.
Coverage: Depends on tile size, gap depth and width.
Color: Available in 18 basic colors, customized colors available.

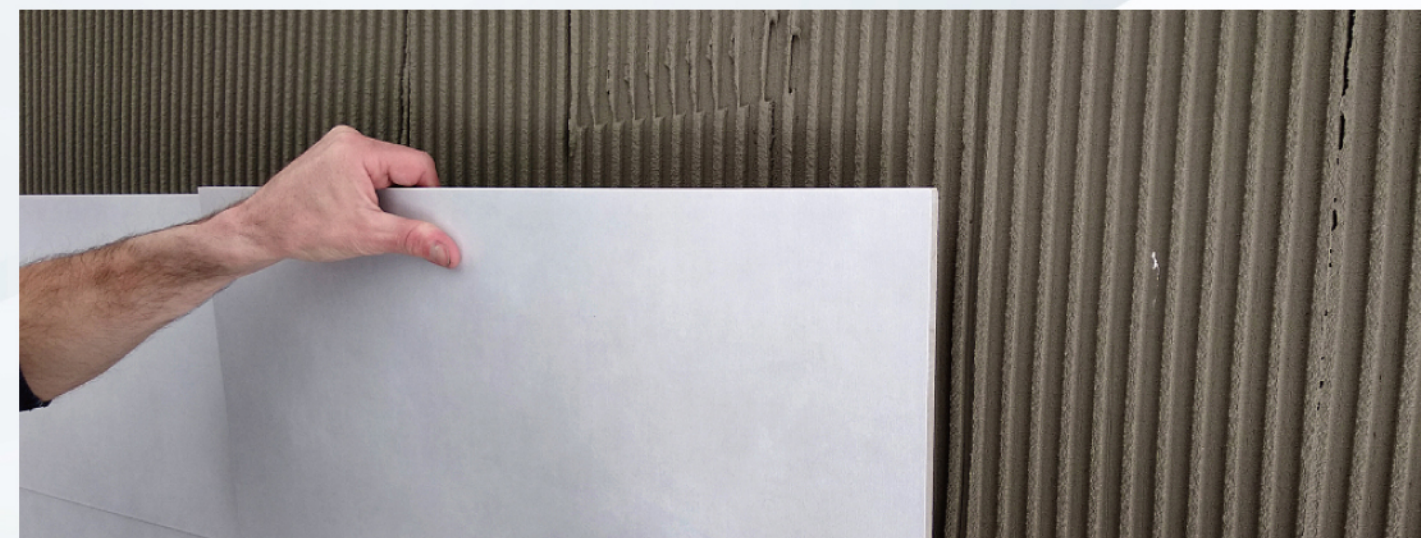

Waterproofing



WPS Crystalline Waterproofing Mortar

20kg/Bag

Cementitious Capillary Crystalline Waterproofing (CCCW) is cement based supplied in powder form and formulated from Portland cement, fine quartz sand and active chemicals, which becomes an integral part of concrete and is used to produce waterproof concrete.

Apply for: Widely used in waterproofing projects on different construction structures such as concrete, masonry and render, which have to be sealed and protected against the influence of water and moisture.

Coverage: As a slurry – Approximately 13 – 16.50 m² @ in two coats

As a dry shake – Approximately 1.8 kg/m²

As a concrete admix – Approximately 0.8% – 1.5% by weight of cement

Color: Grey



K6 Transparent Waterproofing

5/20kg/Pail

A colorless, flexible high polymer waterproof coating used for exterior walls and other construction surfaces. It is based on special copolymer lotion, refined with synthetic rubber lotion modifier, surfactant, plasticizer, etc.

Apply for: Most of the exterior surfaces such as tiles and paints without removing the original coatings.

Coverage: Approximately 120m²/20kg pail

Color: Transparent



K7 Waterplug


5kg/Plastic Sack, 6 bags/Carton

A one-component, quick-setting, Portland-cement-based hydraulic repair mortar that instantly stops running water through holes or cracks in concrete or masonry. It expands as it sets to lock into place even under constant water pressure.

Apply for: As a waterproof plugging mortar or where rapid setting and early strength gain is required, ideal for sealing pipes and conduits and setting anchor bolts and railings.

Mix Ratio: 1kg powder will require approximately 0.35L water. Yield of Approximately 3 litres per 5 kg bag.

Color: Grey.



K8 Exposed Roof Waterproofing and Heat Reflective Coating

20kg/Pail

A single component, tough, UV resistant, acrylic based highly elastomeric waterproof coating for exterior roofs and walls. K8 exhibits high elasticity, excellent bond and forms a film of exceptional strength and flexibility that prevents peeling, fungi/algae growth, future cracks and water seepage. The cured membrane has good crack-bridging properties.

Apply for: Exterior roofs and walls waterproofing and heat reflective.

Coverage: A 20kg pail covers Approximately 80m² in 2 coats.

Color: Grey.



K9 JS Polymer Modified Waterproofing Latex

20kg/Bag

A single component acrylic copolymer admixture specially developed to improve the waterproofing properties of cementations compositions. In combination with standard quality of ordinary Portland cement, it enhances the waterproofing properties on cement concrete surface. The cured slurry bonds to concrete and other surfaces and will water resist both positive and negative pressure.

Apply for: Waterproofing for substrate of concrete, brickwork, blocks, render etc. Applicable to wall, kitchen, toilet, balcony, terrace, roof and other non-exposed waterproof works.

Mix Ratio: 20kg of K9 to mix with approximately 16Kg of Poland Cement (1:0.8).

Color: White.



K10 Undertile Waterproofing Membrane

20kg/Pail

One component water-based acrylic hybrid waterproofing membrane and moisture barrier, ready to use, developed for high performance undertile waterproofing. Suitable for use in wet areas.

Apply for: Be used on substrates of concrete, renders and screeds, fibre-cement sheets, timber and wet area plasterboard, plywood etc.

Coverage: A 20kg pail covers Approximately 17.5m² in 2 coats. Coverage rates are dependent on site conditions.

Color: Grey/White/Blue



K11 Waterproofing Slurry

25kg Powder/Bag + 9kg Latex/Pail

A two-component system consisting of a solvent-free, acrylic based liquid combined with a portland cement-based powder. It provides positive side waterproofing to all common building substrates that require protection from topside water exposure before the installation of tile or stone.

Apply for: All common building substrates, interior and exterior concrete and masonry finishes, and over existing tile, drywall, cementitious backer boards and plywood on all interior floors and walls prior to the installation of tile and stone.

Coverage: Approximately 20 square meters/set, 2 coats.

Color: Grey/Green/Blue.



K12 Flexible Waterproofing Slurry

25kg Powder/Bag + 12.5kg Latex/Pail

A two-component, flexible cementitious waterproofing mortar, to be applied by brush or roller, for waterproofing concrete surfaces such as foundations, retaining walls, balconies, terraces, basins and swimming pools and for protection against aggressive chemical agents.

Apply for: All common building substrates, interior and exterior concrete and masonry finishes and over existing tile, drywall, cementitious backer boards and plywood on all interior floors and walls prior to the installation of tile and stone.

Coverage: Approximately 20 square meters/set, 2 coats.

Color: Grey/Green/Blue.



K13 High Flexible Waterproofing Slurry

25kg Powder/Bag + 18kg Latex/Pail

A high flexible 2-part acrylic-modified cementitious waterproofing material. The K13 react chemically after mixing to form a hard and elastic film which bonds tenaciously to most concrete or masonry substrate to protect against possible ingress of water.

Apply for: Interior and exterior surface of wall and slab, swimming pools, kitchens, toilets, balcony, water tanks. External areas parking deck, planter boxes, sealing precast joints and intersection of two concrete elements. Protection to lightweight blocks, hollow blocks, aerated blocks and roof.

Coverage: Approximately 20 square meters/set, 2 coats.

Color: Grey/Green/Blue.



Wall Putty & Skim Coat & Renders



R1 Interior Wall Putty

20kg/Bag

A mechanically- blended compound of white Portland cement, hydrated lime and specific additives, designed to achieve a steel trowel finish over a Portland cement base, providing a white, smooth surface required for coating/painting etc.
Apply for: Interior wall/ceiling levelling before painting and decoration.
Coverage: A 20kg bag covers Approximately 13-15 square meters.
Color: White.



R2 Exterior Wall Putty

20kg/Bag

Contains high quality Portland cement, mineral-based filling materials, and special binders which provides resistance to water, humidity and dampness and ensures plasticity. It provides crackles application for all types cement based surface repairs and application.
Apply for: Exterior wall levelling before painting and decoration.
Coverage: A 20kg bag covers Approximately 13-15 square meters.
Color: White.



R3 Coarse Wall Putty

20kg/Bag

A single-component cementitious mortar with normal setting time, based on special high resistance binders, selected fine graded aggregate, special additives and synthetic powder polymers, specially formulated to be used as base coat on plastered surfaces.
Apply for: Wall Smoothing and levelling.
Coverage: Approximately 1.0-1.2 kg/m² per mm of thickness. Max. thickness of 2mm/coat.
Color: White.



R4 Flex Wall Putty

20kg Powder/Bag + 2kg Latex/Pail

A two-component, flexible, high-strength, cement-based mortar with fine-grained selected aggregates, special admixtures and synthetic polymers in water dispersion.
Apply for: Wall Smoothing and levelling.
Coverage: Approximately 1.0-1.2 kg/m² per mm of thickness. Max. thickness of 2mm/coat.
Color: White.



B2 Gypsum Wall Putty

20kg/Bag

A gypsum based wall plaster and putty. Special additives optimise product workability and allow for single application regardless of thickness variations, intended for internal use only.
Apply for: Intended for repairing cavities, cracks, mounting electrical installations, performing stucco works and other, and for jointing plasterboards using reinforcing tape.
Can be used for various indoor mineral groundworks (concrete, cement-lime, ceramic, gypsum, etc.)
Coverage: About 1.0kg/m² per thickness of 1mm.
Color: White.



C475 Joint Compound

30kg/Pail

Ready to use, it is ideal for embedding paper tape and for filling, leveling and finishing over gypsum panel joints, fasteners, bead and trim. It is also excellent for skim coating.
Apply for: Suitable to Calcium Silicate board, Plaster Board, Fiber Cement Board
Coverage: Approximately 0.61kg~0.73kg/m² of gypsum panels.
Color: White.



GM11 Interior Acrylic Wall Putty

30kg/Pail

A ready mixed quality acrylic based putty with excellent smooth finish which serves as a filler/leveller in a paint system, which not only imparts the finish, but also helps in higher coverage of the paint. Its water-resistance, strong adhesion, drying and sanding properties make the surface long lasting.
Apply for: Formulated for filling cracks, levelling rough porous cement walls, plaster work and filling defective surfaces
Coverage: 2-3 m²/kg per coat on properly prepared surfaces.
Color: White.



GM12 Exterior Acrylic Wall Putty

30kg/Pail

A ready mixed special acrylic used for filling and levelling plaster for concrete surfaces. It is a fast and economical way to correct and level uneven substrate imperfections such as aerated concrete, small crack surfaces etc. It gives a high quality, even surface for painting, engineered to good weather and water resistant.
Apply for: Formulated for filling cracks, levelling rough porous cement walls, plaster work and filling defective surfaces
Coverage: 2-3 m²/kg per coat on properly prepared surfaces. Color: White.



Wall Paint & Primer



G2 Interior Wall Emulsion Latex Paint

20kg/Pail

A durable acrylic blended latex paint designed for application to a wide variety of interior surfaces. Form a decorative and uniform finish with excellent hiding. Perfect both for original painting and for renovation of old painting coating.
Apply for: Ideal for painting interiors, especially intensively used: staircases, bathrooms, kitchens and for painting public buildings such as: kindergartens, nurseries, offices, hospitals etc.
Coverage: Approximately 100m²/20kg pail.
Sheen: Matt/Eggshell/Semi-gloss/Gloss
Color: Various



G3 Exterior Wall Emulsion Latex Paint

20kg/Pail

A pure acrylic-based paint with non-added lead and mercury which is specially formulated for exterior walls. This premium exterior emulsion is formulated to provide protection against fungus and algae growth, chalking and flaking.
Apply for: Exterior wall decoration, include masonry, brick, plastering substrate and fibre board etc.
Coverage: Approximately 100m²/20kg pail.
Sheen: Matt/Satin/Semi-gloss/Gloss
Color: Various.



G153 Stone Paint

30kg/Pail

100% acrylic textured finish coating that combines granite, quartz, silica sands and other stones to form a seamless surface that has the beautiful and natural appearance of granite.
Apply for: Interior and exterior wall decoration
Coverage: Approximately 3.5-5kg/m².
Color: Various.



E96 Textured Wall Paint

30kg/Pail

A water based, high solids, highly flexible aggregate texture coating. It is designed for application on drywall, masonry, and other properly prepared surfaces where durability, abuse resistance and a decorative appearance is desired.
Apply for: Interior and exterior wall decoration
Coverage: Approximately 3kg/m².
Color: Various.



S3 Interior Wall Primer and Sealer

20kg/Pail

A premium quality, water-based sealer that provides very good resistance to efflorescence and good alkali resistance on properly cured tilt-up concrete, poured-in-place concrete, stucco, and block.
Apply for: Interior wall priming coat and substrate treatment.
Coverage: Approximately 180-200m²/20kg pail.
Color: White.



S4 Exterior Wall Primer and Sealer

20kg/Pail

An acrylic blended latex primer intended for use under latex exterior house paints to achieve a total breathable system, provides a mildew resistant finish and improve resistance to blistering and peeling.
Apply for: Exterior wall priming coat and substrate treatment.
Coverage: Approximately 180-200m²/20kg pail.
Color: White.



S5 Wall Protective Varnish

20kg/Pail

A clear non-flammable liquid water repellent and silicone-acrylic based topcoat designed for interior and exterior facade coating. It has exceptional dirt pick-up resistance as it forms a tough hydrophobic film when dry.
Apply for: to protect painted wall, stucco, masonry and mature concrete etc.
Coverage: Approximately 180-200m²/20kg pail.
Color: Clear.



S9 Concrete Primer

20kg/Pail

An acrylic moisture barrier/primer, protects thin-bed mortars, increases open time, improves adhesion and prevents formation of shrinkage cracks.
Apply for: Substrate of plaster, gypsum fibre boards, MGO, plaster boards, concrete, asphalt, render, sand, cement screed, anhydrite screed and brickwork before tiling.
Coverage: Approximately 160-200 square meters/20kg pail
Color: Blue.



S11 Multi-functional Concrete Primer

20kg powder/Bag+ 10kg latex/Pail

A multi-functional acrylic primer, moisture barrier and waterproofing coating, protects thin-bed mortars and levelling compounds from rapid absorption of water, increases open time, improves adhesion, prevents formation of shrinkage cracks, waterproofing and wall roughening.
Apply for: Substrate of plaster, gypsum fibre boards, MGO, plaster boards, concrete, asphalt, render, sand, cement screed, anhydrite screed, brickwork and glass before tiling.
Coverage: Approximately 20 square meters/set
Color: Grey.



✱ Additives



Acrylic60 Liquid Additive

20kg/Pail

An acrylic polymer liquid additive for cement mixture, designed to enhance their physical characteristics, ease application and increase wear and weather resistance.
Apply for: As bonding agent & admixtures for dry-mixed mortar/slurry/plaster/render etc.
Coverage: Mix ratio depends on the type of dry-mixed mortar.
Color: White.

✱ Flooring Compounds& Screeds



SL9 Self Levelling Compound

20kg/Bag

A self-levelling smoothing compound used in interiors and exteriors for levelling and smoothing differences in thicknesses up to 30 mm on new or existing substrates, preparing them to receive all kind of floorings.
Apply for: For smoothing and levelling of screeds, concrete floors and other hard, rigid bases.
Coverage: Approximately 1850kg/ Cubic Meter
Color: Grey/Off White.



SL10 Rapid-Setting High Strength Cement Repair Mortar

20kg/Bag

A cementitious, fast-setting, rapid hardening, 2H vehicle traffic, early strength gain concrete repairing and patching compound with high compressive strength. It is specially formulated and used to repair and restore damaged concrete, masonry, or plaster surfaces.
Apply for: Patching and repairing damaged floor, repairs to vertical and overhead surfaces.
Coverage: Approximate
1mm thickness, 11-24 m²/20kg bag 3mm thickness, 4-6 m²/20kg bag
Color: Grey/Green/Yellow/Blue/Red/Black

✱ Construction Grout



GG1 General Purpose Grout (GP)

20kg/Bag

A general purpose non-shrink cementitious grout used for filling voids up to 100mm thick. It is a blend of Portland cement, fillers, and additives that impart controlled expansion while plastic to eliminate shrinkage.
Apply for: General grouting, grouting works for machine foundations, anchor bolts, precast grouting, filling of cavities, gaps, recesses, etc.
Coverage: Approx Bags required per cubic meter: 100 (Dry Pack), 95 (Flowable), 93 (Fluid).
Color: Grey.



GG2 High Early Strength Grout (HES)

20kg/Bag

A high performance, high early strength gain, expanding and shrinkage compensated Class C precision grout. The highly fluid free flowing grout is a blend of Portland cement and graded aggregate and chemical additives. Expansion compensated for shrinkage in both plastic and hardened states.
Apply for: Precision grouting, Heavy duty support beneath machine base plates, Anchoring bolts, bars and fittings, Bridge bearing and crane rails, Critical equipment base plates, Precast wall panels, beams and columns, Underpinning.
Coverage: Approx Bags required per cubic meter: 94 (Flowable), 98 (Flowing).
Color: Grey.

✱ EPS Basecoat Adhesive



PB02 EPS/XPS Basecoat & Adhesive

25kg/Bag

One-component, polymer-modified, flexible cement based, dry powder material used as an adhesive and base coat for EPS/XPS in EIFS. In acc. with EN 998-1.
Apply for: As adhesive between mineral substrates and EPS boards, an embedding mortar applied over the EPS boards to embed the glass fiber mesh prior to application of finish coats.
Coverage: As adhesive for EPS Boards, 4.5 – 6.0 kg/m², As reinforcing material on EPS Boards, 4.0 – 7.0 kg/m².
Color: Grey.

